

## Back Panel mini-ITX I/O shields


Designed for the greatest level of flexibility possible for external I/O

At the rear of 1U chassis DS1505 has 130mm wide by 29,9mm high cutout aperture for the stacked I/O connectors on the motherboard. This area is blanked by motherboard-specific I/O shields, thus creating a motherboard-independent chassis.

The shields are mounted at the motherboard, unlike regular shields that are clipped to the chassis.

Three types of differently-perforated shields are presented in this document:

- 1) EPIA 5000/6000 ("E5")
- 2) EPIA M9000/M10000 ("E9")
- 3) EPIA CL6000/CL10000 ("CL")

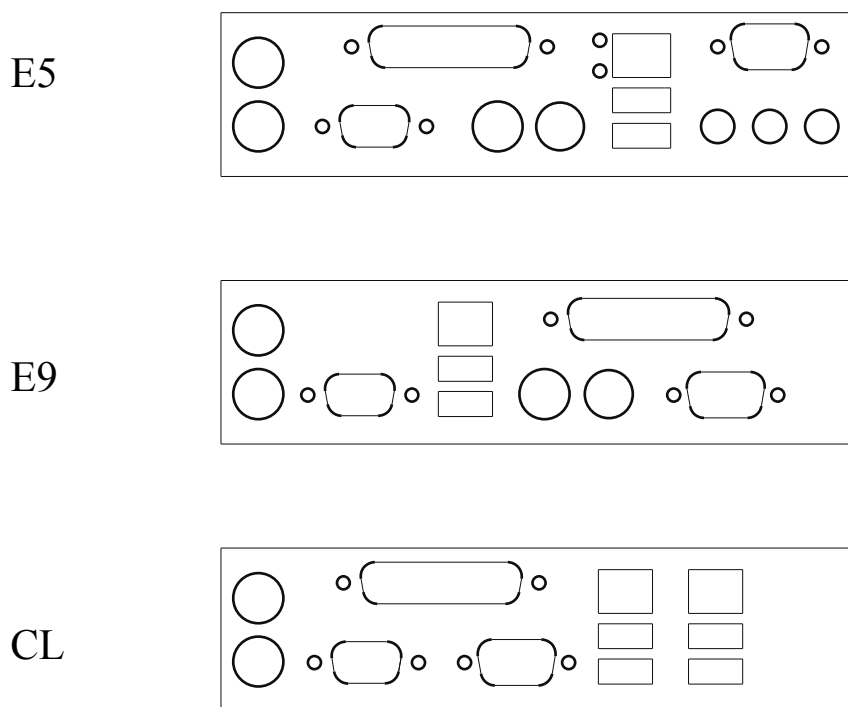

These shields are designed for VIA EPIA mini-ITX motherboards. DS15050 chassis is equipped only with 1 shield. You should choose type of shield that You need and make correct order of DS15050.

For example: DS15050-E5 is a chassis with "E5" shield.

**Attention.** Motherboards EPIA M9000/M10000/CL6000/CL10000 have high sound connector that cannot be fitted in 1U chassis. You should either order motherboards without sound connector or remove this connector Yourself. "E9" and "CL" shields do not contain holes for this connector!

If You have in mind some special motherboards, please indicate type of your motherboard and inform us. We can produce necessary shields in advance and will have it in stock.