




HOUSING	Metal / Aluminum
IMPELLER	Aluminum, diameter 60mm
BEARING	Ball
OPERATING TEMPERATURE	-20 °C to +70 °C
MOTOR TYPE	DC Brush Type Motor
DIELECTRIC STRENGTH	5 mA Max. at 500 VAC 60Hz for 1 minute (Between Frame and Terminal)
INSULATION	Class E
INSULATION RESISTANCE	10 meg Ohms Min. @500 VDC (Between Frame and Terminal)
SAFETY	Impedance Protected
ROHS COMPLIANCE	Yes


SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	SPEED RPM	MAX. AIR PRESSURE (mmH ₂ O)	AIR FLOW		NOISE dB(A) @ 1M	WEIGHT (g)
					CFM	m ³ /min		
DFB60300V24HL	24	2.00	3500	8.5	244	6.9	65	2060
DFB60300V48H	48	1.00	3500	8.5	244	6.9	65	2060

DIMENSION

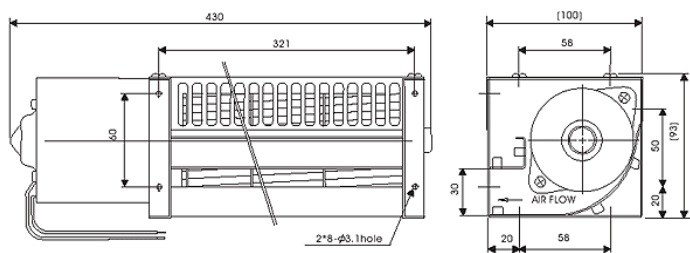

AIR PERFORMANCE

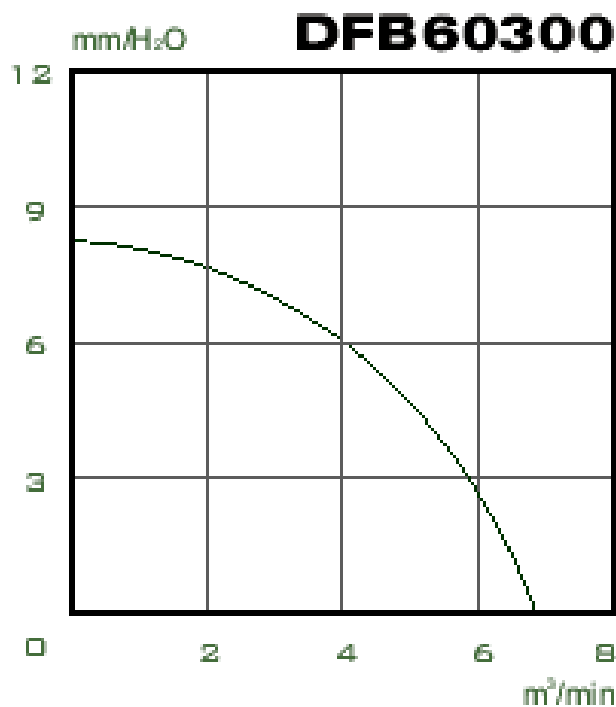

ACTIVA INC.